ViewSonic | COMMERCIAL DISPLAYS
IFP7500


Key **Features**


Ultra HD Resolution | Dual Slot-in PC Capability | 20-point Multi-touch Interactive Screen | Out-of-Box Collaboration | Qwizdom Oktopus™ and Ximbus™ Solutions



Product **Description**

Featuring 4K Ultra HD resolution and an immersive 20-point touch screen, the ViewSonic® ViewBoard® IFP7500 delivers incredible collaborative capabilities for 21st century boardrooms and classrooms. With astonishing 20-point simultaneous touch capabilities and vBoard™ embedded software, this 75" interactive flat panel lets multiple users write or draw on the screen with their fingers and styluses. With a built-in quad-core processor, as well as versatile connectivity options including multiple HDMI, VGA, RS232, RJ45, and USB ports, this display provides powerful computing for annotation and multimedia playback without the need for a PC. This display delivers optional slot-in PC capability, as well as future-proof Intel® SDM capability, for more computing-intensive interactive applications. The IFP7500 features a VESA-compatible design and can be placed on a wall mount, or on an optional trolley cart for flexible installation in classrooms and corporate meeting rooms.

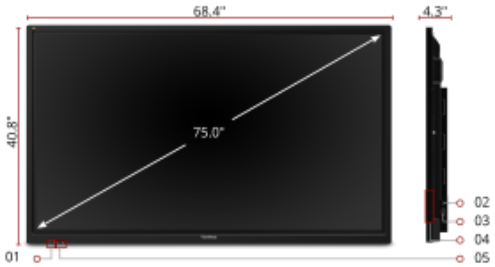

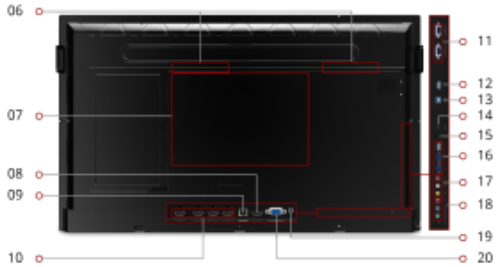

SB 2.0 Type A (for slot-in PS PC)
ower Switch
C In
4. Menu Controls
5. USB 3.0 Type A x2 (for Android embedded OS)
6. Internal Speakers
7. VESA® Compatible Wall Mount 400 x 600 mm
8. HDMI Out
9. LAN
10. HDMI (x4)
11. RS232 In/Out
12. USB 2.0 Type A
13. USB 3.0 Type B
14. SPDIF Out
15. Audio Out
16. USB (2.0 Type A x1, 3.0 Type A x2)
17. Composite In
18. YPbPr In
19. Audio In
20. VGA In

75"
DISPLAY

3840 x 2160
RESOLUTION

450 cd/m2
BRIGHTNESS

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	75
Viewable Area (in.):	75
Light Source:	LED
Resolution:	3840 x 2160
Aspect Ratio:	16:9
Static Contrast Ratio:	1,200:1
Brightness:	450 cd/m2
Response Time (Typical GTG):	8ms
Viewing Angles:	178º horizontal, 178º vertical
Panel Surface:	Anti-glare 7H tempered glass

Embedded Player:

Android Version:	5.0
GPU:	ARM Mali450 MP4
CPU:	ARM Cortex A53 Quad Core Processor 1.5GHz
Memory:	2GB
Storage:	16GB
Interface:	OSD / Remote Control / Annotation overlay
Ethernet LAN:	10/100 Mbps

Audio:

Internal Speakers:	20W (x2)

Connector:

HDMI(4), VGA(1), YPbPr(1), Composite RCA(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), SPDIF Audio Out(1), USB 3.0(2), USB 2.0(2), OPS PC Slot(1), USB 2.0 OPS passthrough(2), USB B Touch Port(1), RS232 Out(1), Ethernet LAN (RJ45)(1), SDM Slot(1)

Power:

Voltage:	100-240 VAC, 50-60Hz
Consumption (typical):	300W
Stand-by:	<.5W

Controls:

On Screen Display:	Input, Volume, Backlight, Audio, Screen, Display, Adjust
Remote Control:	Volume, Channel, Source, Mute, Back, Input, Menu

Operating Conditions:

Temperature:	32-104º F (0 - 40º C)
Humidity (non-condensing):	10-90%

Touch:

Touch Technology:	Infrared
Touch Points:	20-Point Touch

Weight (metric):

Net (kg):	60.6
Gross (kg):	83.9

Weight (imperial):

Net (lbs):	133.7
Gross (lbs):	185.0

Dimensions (metric) (WxHxD):

Packaging (mm):	1990 x 1165 x 320
Physical (mm):	1736.8 x 1035.3 x 108.2

Dimensions (imperial) (WxHxD):

Packaging (in.):	78.4 x 51.8 x 13.8
Physical (in.):	68.4 x 40.8 x 4.3

Mount:

VESA Compatible:	600 x 400 mm

General:

Warranty: 3-year limited warranty on parts, labor and backlight, onsite warranty

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: IFP7500 display, stylus pen x 2, power cable, remote control with batteries, ViewSonic Wizard CD (User Guide), Quick Start Guide, USB cable, audio cable, camera bracket, VGA cable, power cords

Regulations: cTUVus, FCC, Mexico Energy, CE, CB, RoHS, ErP, WEEE

UPC: 766907899412

Accessories:

Intel Unite, LB-STND-003, LB-STND-005-3, NMP620-P10, NMP620-P10X, SW-020, SW-110, SW-111, SW-UP-117, VPC12-WPO, WMK-047, WMK-047-2, myViewBoard for Windows

Copyright © ViewSonic Corporation 2000-2018. All rights reserved. (02/07/2018 01:45 AM PST)