ViewSonic

LED DISPLAY

TD1655


Key **Features**

- Easily extend your content from laptops and mobile devices
- One-cable solution for audiovisual, power, and touch signal transmission
- Flexible display setup – work at any angle
- Compact size, light weight, and highly portable
- Sturdy and durable design



Product **Description**

The ViewSonic TD1655 is a portable 16” Full HD touch monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual, power, and touch signal transmission. The adjustable wide stand and pivot-able display will support your working angles. With the anti-slip cover, stainless case, aluminum stand, and 6H hardness screen, reliability is embodied in the design.

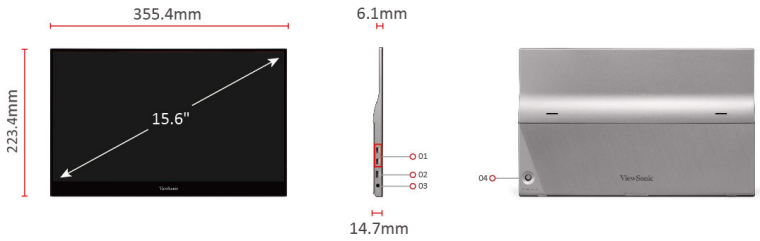

1. USB Type C x2
2. Mini HDMI
3. Audio Out
4. Joy Key

Visit Us www.viewsonic.com

DISPLAY

Display Size (in.):	16
Viewable Area (in.):	15.6
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD
Static Contrast Ratio:	800:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m² (typ)
Colors:	262K
Color Space Support:	6 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	6.5ms
Response Time (GTG w/OD):	6.599ms
Response Time (Typical Tr+Tf):	30ms
Viewing Angles:	178º horizontal, 178º vertical, CR>5; 170º horizontal, 170º vertical, CR>10
Backlight Life (Hours):	15000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Color Gamut:	NTSC: 45% size (Typ), sRGB: 64% size (Typ)
Pixel Size:	0.179 mm (H) x 0.179 mm (V)
Touch Screen:	Projected Capacitive, 10-point multi-touch
Surface Treatment:	Glossy w/ anti-finger print, Hard Coating (≧6H)
Cover Glass Thickness:	0.8mm

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

USB 3.1 Type C:	2
3.5mm Audio Out:	1
Mini HDMI:	1
Power in:	External power adapter

AUDIO

Internal Speakers:	0.8Watts x2

POWER

Eco Mode (Conserve):	6W
Eco Mode (optimized):	6.9W
Consumption (typical):	8W
Consumption (max):	8.3W
Voltage:	AC 100-240V, 50/60 Hz
Stand-by:	0.5W
Power Supply:	External

ADDITIONAL HARDWARE

CONTROLS

Physical Controls:	Up, Right, Down, Left, Power
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

INPUT SIGNAL

Frequency Horizontal:	15 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - mini HDMI (v1.4), Micro-Packet - Type C

ERGONOMICS

Tilt (Forward/Back):	20º / 60º

WEIGHT (IMPERIAL)

Net (lbs):	2.1
Net Without Stand (lbs):	2.1
Gross (lbs):	5.1

WEIGHT (METRIC)

Net (kg):	1
Net Without Stand (kg):	1
Gross (kg):	2.3

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	17.3 x 11.3 x 3.5
Physical (in.):	14 x 8.8 x 0.6
Physical Without Stand (in.):	14 x 8.8 x 0.6

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	440 x 288 x 89
Physical (mm):	355 x 223 x 16
Physical Without Stand (mm):	355 x 223 x 16

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Bronze, CEC, NRCan, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI
PACKAGE CONTENTS:	TD1655 x1, mini HDMI to HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB Type-C to Type-A 3.2 Gen1 Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Protect cover x1, Clean cloth x1, Passive touch pen x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Power Management:	Energy Star standards, EPEAT

Copyright © ViewSonic Corporation 2000-2020. All rights reserved.